

### Giving Shape to Ideas

Inline Digital Foiling Solution

**METEOR Unlimited Colors XL+** 







# Specifications

Color Print Speed	Up to 71 <sup>(1)</sup> A4 sheets per minute.	
Print Quality and Line	Print resolution up to 3,600 dpi and line screens ranging	
Screens	from 130 to 270 lpi.	
Printable Formats	• Minimum: 100x148 mm - 3.9" x 5.8"	
	• Maximum: 330x1,200 mm - 13" x 47"	
Supported Substrate	Paper from 65 to 400 gsm (coated and uncoated);	
Thicknesses	<ul> <li>Plastic from 100 to 400 μm (PVC, Teslin®, Vinyl).</li> </ul>	
	<ul> <li>Envelope from 100 to 400 µm with/without window.</li> </ul>	
PaperInput	• 2 Trays	
	1,500 sheets total capacity (500+1,000 sheets).	
	Bypass	
	250 sheets capacity from 65 up to 300 gsm.	
	Integrated Pneumatic Loader	
	3,000 sheets maximum capacity	
Registration	Precise registration with exclusive Automated Skew and Centering	
	Adjustment (ASCA) system. Comparable to offset, applies to all	
	printed works (front-back, page-page at ±0.5 mm).	
Feeder Table	Feeder table with fully motorized and automatic side lay guide.	
	Auto-adjusts for format width and paper skew.	
	Ultrasonic double sheet detection system.	
Paper Output	High pile motorized stacker for hosting up to 6,000 sheets.	
External Controller	Fiery FS100 Pro.	
Personalization and	100% compatible with market standard software solutions	
Variable Data Printing	(Adobe InDesign, Bartender, Newleaf).	
Electrical Specifications	Feeder: 1 x (230V / 1P + N + E / 32 A)	
	Printer: 1 x (230V / 1P + N + E / 32 A)	
	iFOIL T: 2 x (230V / 1P + N + E / 32A)	
	1 x (230V / 1P + N + E / 16 A)	
	Stacker: 1 x (230V / 1P + N + E / 16 A)	
	Computer & Rip: 3 x (230V / 1P + N + E / 16 A)	
Operating Environment	<ul> <li>Required temperatures:18° to 30°C (59°F to 86°F)</li> </ul>	
	Optimum between: 20° to 22°C (64° to 73°F)	
	Operating Humidity: 30% to 50% RH	
	Optimal condition: 40%	
Dimensions & Weight	LxWxH: 6.73x1.40x1.81 meters/264"x55"x71"	
	2,002 kg/4,413 lbs	

(1) without calibration and stabilization

Digital Foiling Station Supported Thicknesses	• Minimum: 80 gsm equals to 80 µm prior to printing and		
With Foil Without Toner	possible lamination.  • Maximum: 350 gsm equals to 350 µm prior to printing and		
Overprinting			
	possible lamination.		
Supported Thicknesses	Minimum: 150 gsm equals to 150 µm prior to printing and		
With Foil and Toner	possible lamination.		
Overprinting	<ul> <li>Maximum: 350 gsm equals to 350 µm prior to printing and</li> </ul>		
	possible lamination.		
Printing Speed	Up to 50 <sup>(1)</sup> A4 sheets per minute		
Paper Formats	<ul> <li>Minimum: 110x220 mm – 4.3" x 8.7"</li> </ul>		
	Maximum: 330x1,200 mm <sup>(2)</sup> - 13" x 47"		
Substrates	The Hot Foil process is compatible with most the of substrates		
	supported by the Meteor Digital Press (uncoated or coated paper,		
	textured paper, envelopes, PVC, Teslin, etc.).		
Hot Foils	Utilizes selected hot foils available on the market. Integrated foil		
	consumption system. Popular foil colors are supported such as gold,		
	silver, blue, red, green and black.		
Rolls	Hot foil are delivered on rolls. Standard roll is 320 mm width and		
	305 meters long, using a one inch core. Possibility to use smaller widths such as 100 mm and add them up on the same axis for		
	laying up to 2 simultaneous colors. Option: 3 inch core automatic		
	unwinding.		
Foil Manager	Meteor Manager is a powerful supervision software platform.		
Software Suite	Within a single tool, it gives access to the operator to parameters		
John Mile Jake	to manage and setup the production from 4-color printing		
	through foil finishing. All parameters can also be stored for further		
	reprinting, saving time and improving efficiency.		
Electrical Specifications	Feeder: 1 x (230V / 1P + N + E / 32 A)		
	Printer: 1 x (230V / 1P + N + E / 32 A)		
	iFOIL T: 2 x (230V / 1P + N + E / 32A)		
	1 x (230V / 1P + N + E / 16 A)		
	Stacker: 1 x (230V / 1P + N + E / 16 A)		
	Computer & Rip: 3 x (230V / 1P + N + E / 16 A)		
Operating Environment	Required temperatures:18° to 30°C (59°F to 86°F)		
	Optimum between: 20° to 22°C (64° to 73°F)		
	Operating Humidity: 30% to 50% RH     Optimal condition: 40%		
Dimensione 9 Miles	LxWxH: 6.73x1.40x1.81 meters/264"x55"x71"		
Dimensions & Weight	2,002 kg/4,413 lbs		
	2,002 kg/4,413 lbs		

- (1) print speed may vary according to the substrate and print parameter used (2) please contact Konica Minolta to check your substrates/toner/foils compatibility (3) duplex technical limitation. Please contact us.

## Partnership.

Konica Minolta can help give shape to your ideas and partner with you to achieve your corporate objectives. Contact us to realize opportunities in:

Information Management	IT Services	Technology
Enterprise Content Management (ECM)	Application Services	Office Multifunction Business Solutions
Document Management	Cloud Services	Commercial and Production Printers
Automated Workflow Solutions	IT Security	3D Printers
Business Process Automation	Managed IT Services	Wide Format Printers
Security and Compliance	IT Consulting & Projects	Laptops, Desktops and Computer Hardware
Mobility		Servers and Networking Equipment
eDiscovery Services		Managed Print Services (MPS)
		Managed Enterprise Services

For complete information on Konica Minolta products and solutions, please visit: CountOnKonicaMinolta.com

© 2017 KONICA MINOLTA BUSINESS SOLUTIONS U.S.A., INC. All rights reserved. Reproduction in whole or in part without written permission is prohibited. KONICA MINOLTA, the KONICA MINOLTA logo, bizhub and Giving Shape to Ideas are registered trademarks or trademarks of KONICA MINOLTA, INC. All other product and brand names are trademarks or registered trademarks of their respective companies or organizations. All features and functions described here may not be available on some products. Design & specifications are subject to change without notice.



KONICA MINOLTA BUSINESS SOLUTIONS U.S.A., INC.

CountOnKonicaMinolta.com








f v o in lem#: MGIMETEORXLBRO



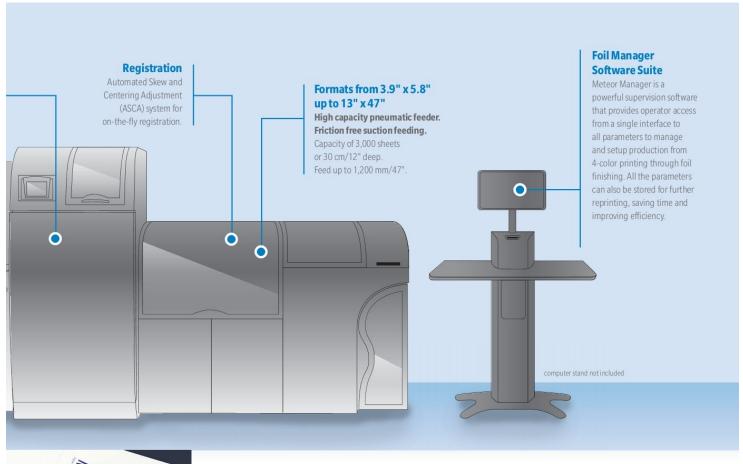



### **SECOND-PASS TONER**

- First-pass foiling can be overprinted with CMYK toner to create unlimited range of metallic colors
- Brilliant light-reflecting qualities of gold and silver foil



# ...iFoil Technology

The iFOIL T module connects inline with the MGI Meteor Press. This digital enhancement option allows printers to generate lucrative, high-margin output, expand their service portfolios and strengthen their client relationships.

#### **First Pass Foiling**

Printing jobs can be embellished with the original foil color via a fusion of toner & foil adhesion to the substrate surface. Application examples include: logos, shapes, text, lines and highlights. The ability to add elements like gold & silver to digitally printed output dramatically increases the value of the material to the customer.

#### **Second Pass Toner**

With no click charges involved, printers can also overprint the foil applied during the first pass with another application of CMYK toner to create a limitless kaleidoscope of tints & hues - as well as precise spot coats to match colors generated from other environments. The lightreflecting qualities of metallic foil provide a powerful foundation for expanding the gamut of effects to a virtually unlimited color range.



AHDP®, a MGI exclusive and patent system, produces on-demand holographic imprints with Meteor Unlimited Colors presses, speciallyformulated toner and foil films. The digital holographic effects offer customized security authentication options at a mere fraction of traditional costs. This powerful anti-counterfeiting method is now economically accessible without the need of expensive dies and lengthy tooling processes. AHDP also works in conjunction with variable data printing (VDP) to create unique document identification applications.







